PAR-38 LED BULBS

25 000 HOURS | C UL US LISTED UL NO.: 471997 | **DIMMABLE**

LEDPAR38-18W / 30K AND 40K

TECHNICAL SPECIFICATIONS

- 18 WATTS (Equivalent to 150W)
- 120 VOLTS
- 1400 LUMENS
- Degrees Kelvin: 3000K / 4000K
- Beam Angle: 38°
- CRI: 80
- Bulb color: 3000K White / 4000K white or black

DIMENSIONS

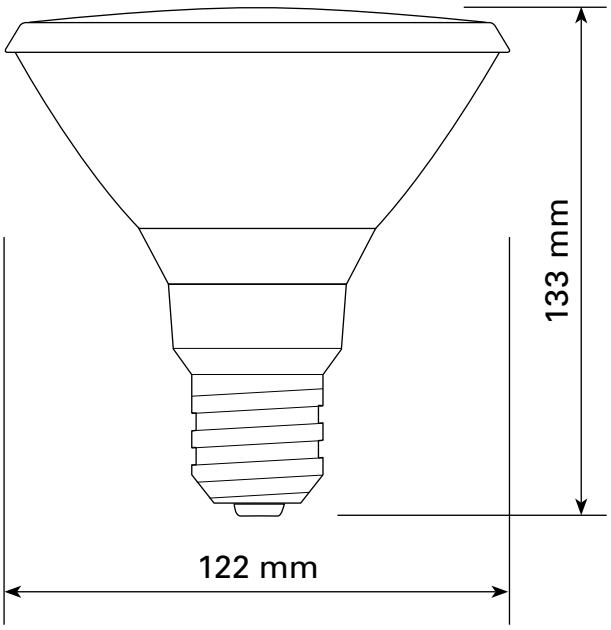

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

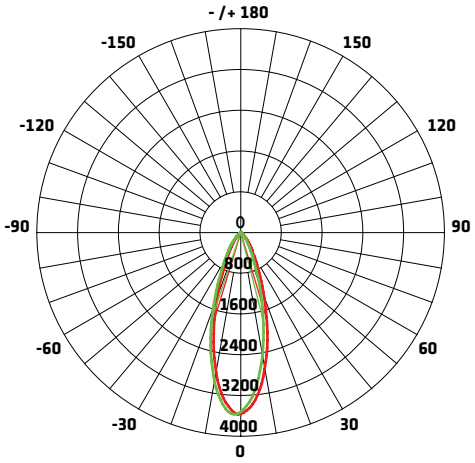

AVERAGE BEAM ANGLE (50%): 33.4°

Unit: CD — C0/180,33.7° — C90/270,33.0°

FIGURE AAI

Flux out: 727.9 1m

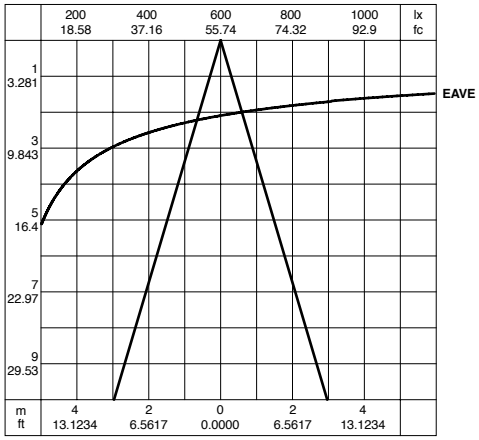

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

While our LED bulbs function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED bulbs, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 15 8-Watt PAR20 bulbs (total 120 Watts).

LUMIFARO

4300 Grande-Allée Blvd, Boisbriand
QC, Canada J7H 1M9

450 979-0667
info@lumifaro.com
www.lumifaro.com

CLIENT:	
PROJECT:	
DATE:	