DOME FLUSH CEILING LIGHTS

AVERAGE LIFETIME **35 000** HOURS | Intertek | ENERGY STAR | **DIMMABLE**

CNL15-23W / 30K AND 40K

TECHNICAL SPECIFICATIONS

- Sizes: 15'' dia. x 4 1/2'' H
- 120 VOLTS
- 23 Watts integrated LED
- 1750 LUMENS
- Degrees Kelvin: 3000K / 4000K
- IRC : > 80
- IC and Airtight
- Globe: acrylic

DIMENSIONS / CNL-15

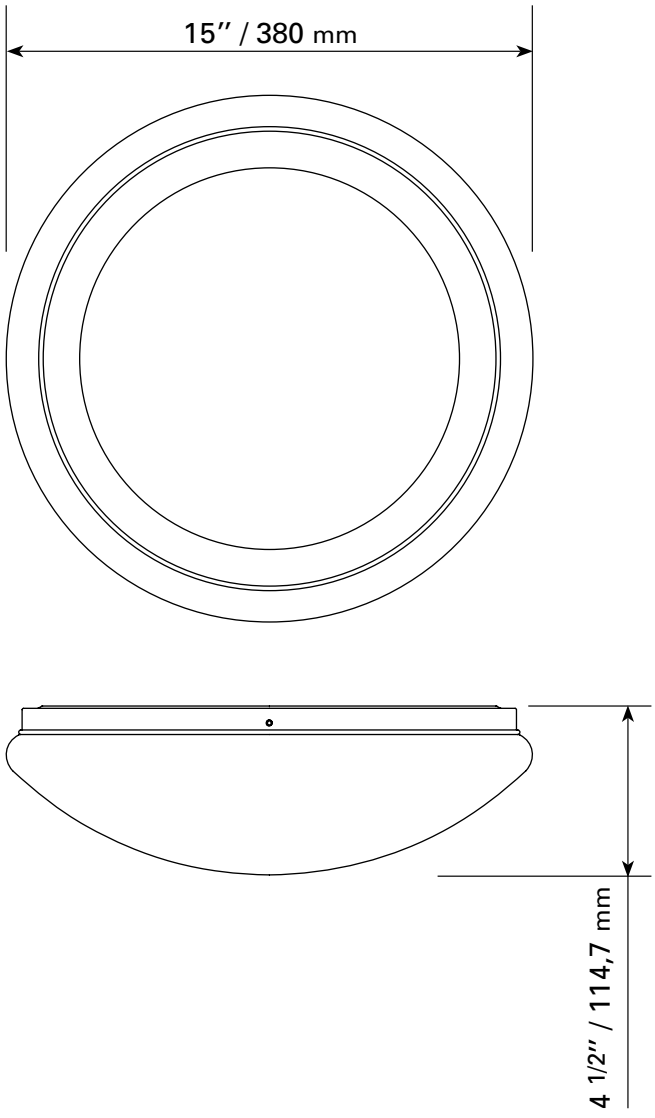

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

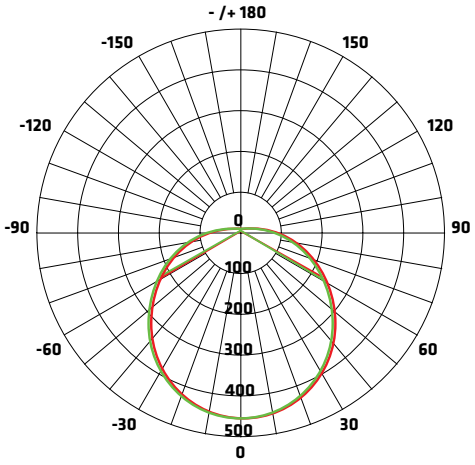

AVERAGE BEAM ANGLE (50%): 119.1°

Unit: CD — C0/180,118.9° — C90/270,119.3°

FIGURE AAI

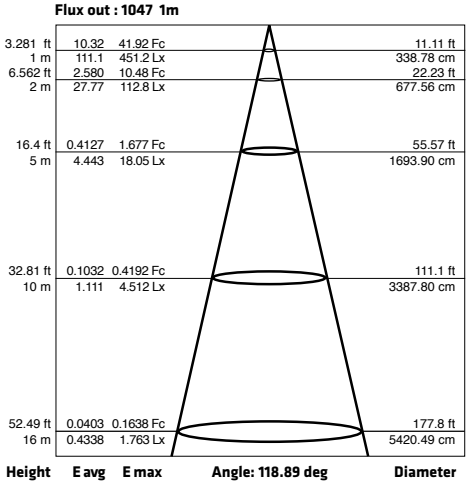

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMIFARO

4300 Grande-Allée Blvd, Boisbriand
QC, Canada J7H 1M9

450 979-0667
info@lumifaro.com
www.lumifaro.com

CLIENT:	
PROJECT:	
DATE:	