

4830

SQUARE DIRECTIONAL BEAM TRIM

LED-10W

For insulated or non insulated ceilings

50W-PAR-20 HALOGEN

For non insulated ceilings only

FOR 4" HOUSINGS


TECHNICAL SPECIFICATIONS

- Colours: WH-White, BS-Brushed steel, BK-Black, CH-Chrome
- Beam angle adjustment: 30°

HOUSINGS REQUIRED


1. For insulated or non insulated ceilings

- Housing PR-400-IC + plaster frame PF-414

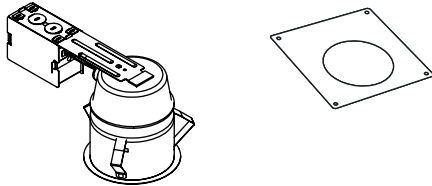

2. For insulated ceilings (plaster frame not required)


- Housing IB-400





3. Commercial housing (plaster frame not required)

(Not recommend for insulated ceilings)

- Housing NC-400



SIZES / TRIM

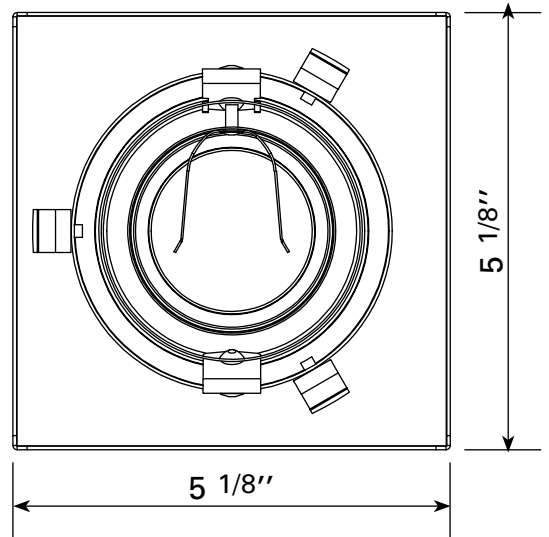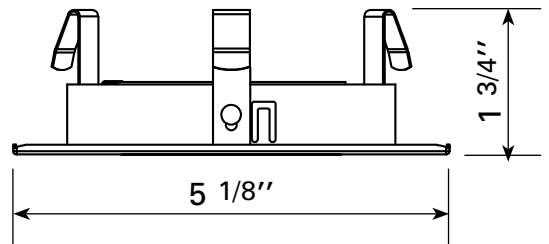

CLIENT:
PROJECT:
DATE: