


**LEDCTC-8W / 30K AND 40K**




**TECHNICAL SPECIFICATIONS**

- 8 WATTS
- 120 VOLTS
- 800 LUMENS
- Degrees Kelvin: 3000K / 4000K
- CRI: 80
- Bulb color: Clear

**DIMENSIONS**

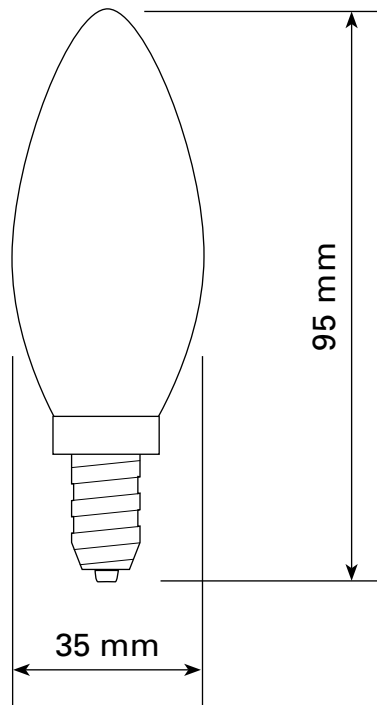

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**

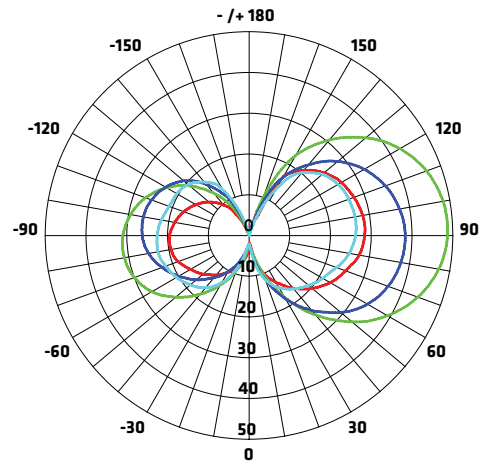

AVERAGE BEAM ANGLE (50%): 325.2°

Unit: CD

- C0/180,323.4°
- C30/210,325.5°
- C60/240,326.3°
- C90/270,325.5°

**FIGURE AAI**

Flux out: 26.35 lm

Height	E avg	E max	Diameter
1 m	8.389	12.62 Lx	200.00 cm
2 m	2.097	3.155 Lx	400.00 cm
3 m	0.9321	1.402 Lx	600.00 cm
4 m	0.5243	0.7887 Lx	800.00 cm
5 m	0.3355	0.5048 Lx	1000.00 cm
6 m	0.2330	0.3506 Lx	1200.00 cm
7 m	0.1712	0.2576 Lx	1400.00 cm
8 m	0.1311	0.1972 Lx	1600.00 cm
9 m	0.1036	0.1558 Lx	1800.00 cm
10 m	0.0839	0.1262 Lx	2000.00 cm

Angle: 90.00 deg

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

While our LED bulbs function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED bulbs, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 15 8-Watt PAR20 bulbs (total 120 Watts).

CLIENT:
PROJECT:
DATE: