


LEDGT25-5W / 30K




TECHNICAL SPECIFICATIONS

- 5 WATTS
- 120 VOLTS
- 500 LUMENS
- Degrees Kelvin: 3000K
- CRI: 80
- Bulb color: Clear

DIMENSIONS

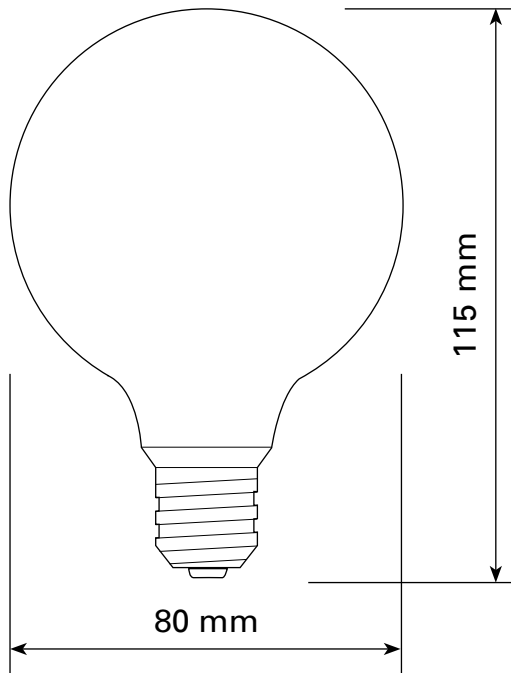

**LUMINOUS INTENSITY
DISTRIBUTION DIAGRAM**

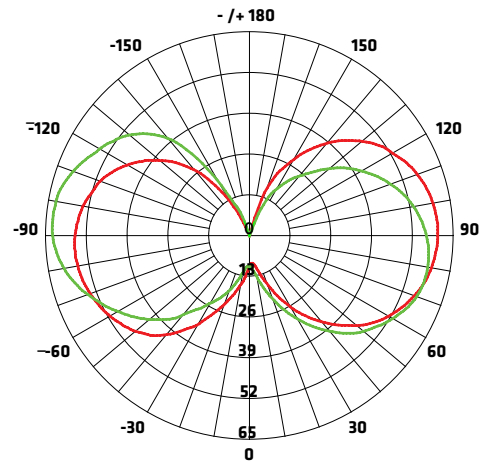

AVERAGE BEAM ANGLE (50%): 320.6°
Unit: CD — C0/180,320.5° — C90/270,320.7°

FIGURE AAI

Flux out: 54.49 lm

Height	E avg	E max	Angle: 90.00 deg	Diameter
1 m	17.34	25.54 Lx		200.00 cm
2 m	4.336	6.386 Lx		400.00 cm
3 m	1.927	2.838 Lx		600.00 cm
4 m	1.084	1.597 Lx		800.00 cm
5 m	0.6937	1.022 Lx		1000.00 cm
6 m	0.4818	0.7096 Lx		1200.00 cm
7 m	0.3540	0.5213 Lx		1400.00 cm
8 m	0.2710	0.3991 Lx		1600.00 cm
9 m	0.2141	0.3154 Lx		1800.00 cm
10 m	0.1734	0.2554 Lx		2000.00 cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

While our LED bulbs function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED bulbs, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 15 8-Watt PAR20 bulbs (total 120 Watts).

CLIENT:
PROJECT:
DATE: