
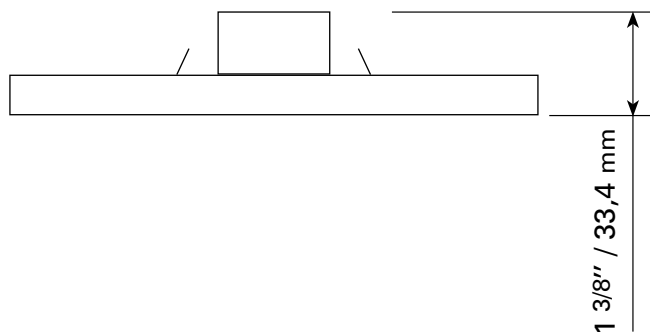


CHL11RP-30K/40K


TECHNICAL SPECIFICATIONS

- Sizes: 11" dia. x 1 3/8" H
- Color: WH-White
- 120 VOLTS
- 12 Watts integrated LED
- 850 LUMENS
- Fits on an octagon junction box, mounting hardware included
- Degrees Kelvin: 3000K, 4000K, to choose with the selection button
- CRI: > 80
- SDCM: < 7
- Approved for wet locations

DIMENSIONS / CHL11RP

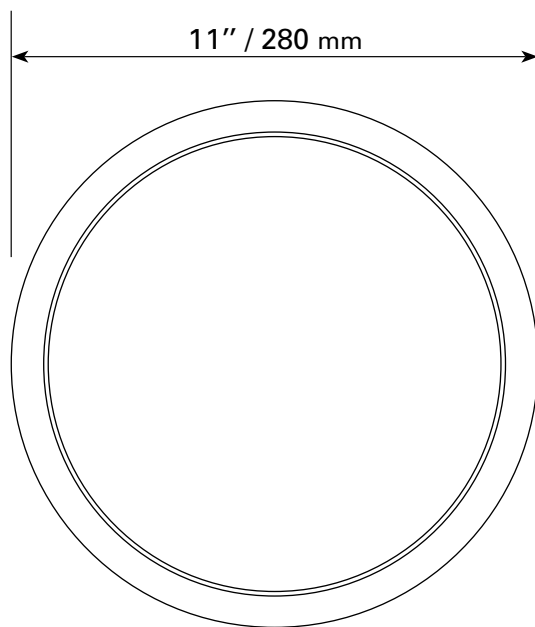

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

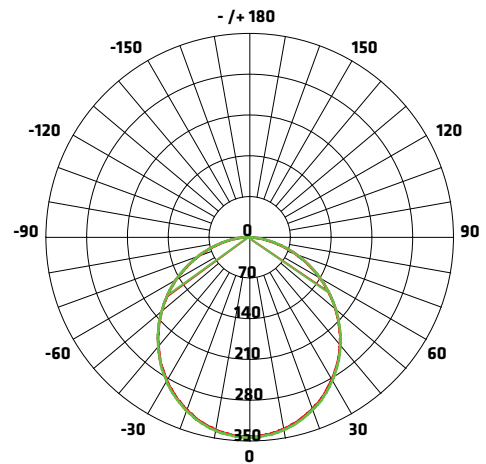

AVERAGE BEAM ANGLE (50%): 113.1°

Unit: CD — CO/180,113.1° — C90/270,113.1°

FIGURE AAI

Flux out: 761.2 1m

Height	E avg	E max	Angle: 112.88 deg	Diameter
1 m	80.76	337.6 Lx		301.50 cm
2 m	20.19	84.41 Lx		603.01 cm
3 m	8.973	37.51 Lx		904.51 cm
4 m	5.048	21.10 Lx		1206.01 cm
5 m	3.230	13.51 Lx		1507.52 cm
6 m	2.243	9.379 Lx		1809.02 cm
7 m	1.648	6.890 Lx		2110.53 cm
8 m	1.262	5.275 Lx		2412.03 cm
9 m	0.9970	4.168 Lx		2713.53 cm
10 m	0.8076	3.376 Lx		3015.04 cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



4300 Grande-Allée Blvd, Boisbriand
QC, Canada J7H 1M9

450 979-0667

info@lumifaro.com
www.lumifaro.com

CLIENT:
PROJECT:
DATE: