

FLP6-13W-3CCT-WH-2H


TECHNICAL SPECIFICATIONS

- Sizes: 7 1/16" dia. x 1 3/4" H
- Colours: WH-White
- 120 VOLTS / LED 13 WATTS
- 1050 LUMENS
- Degrés Kelvin : 3000K / 4000K / 5000K au choix à l'aide du bouton de sélection
- Beam angle: 120°
- IRC : > 80
- 6 5/8" hole to be drilled
- IC and Airtight
- Approved for damp locations
- Operating temperature: from -25° to +45°


ACCESSORIES AVAILABLE

- Plaster frame PF-614
- 6 ft extension FLP-EX6-CCT

RECESSED LIGHTING DIMENSIONS

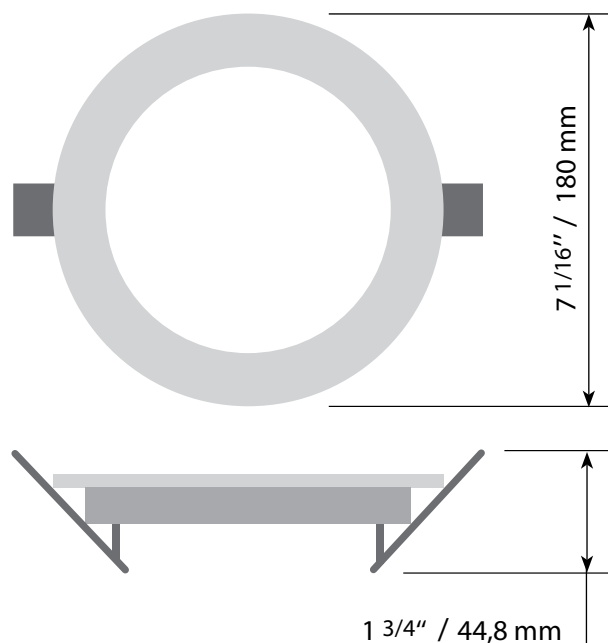

JUNCTION BOX DIMENSIONS

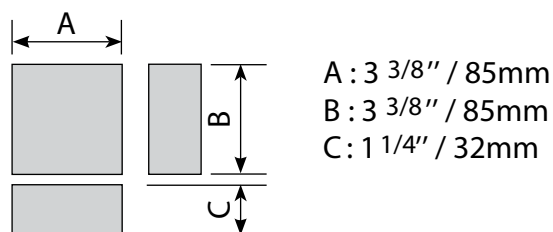

4300 Grande-Allée Blvd, Boisbriand
QC, Canada J7H 1M9

450 979-0667
info@lumifaro.com
www.lumifaro.com


CLIENT:

PROJECT:


DATE:

EASY INSTALLATION


■ 1.

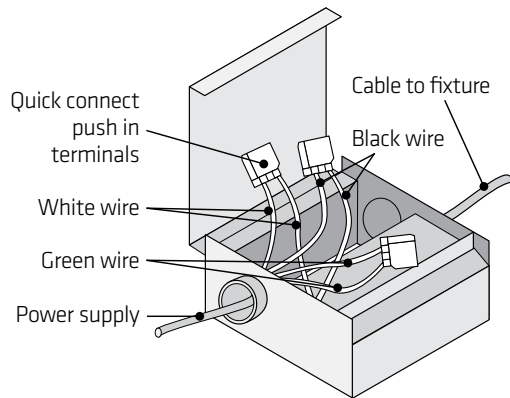

■ 2.

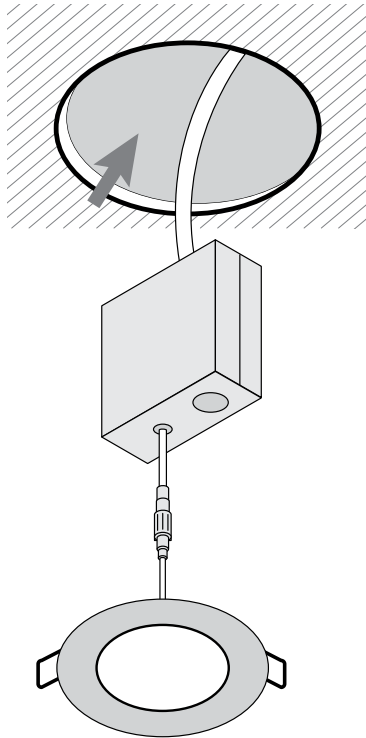

■ 3.

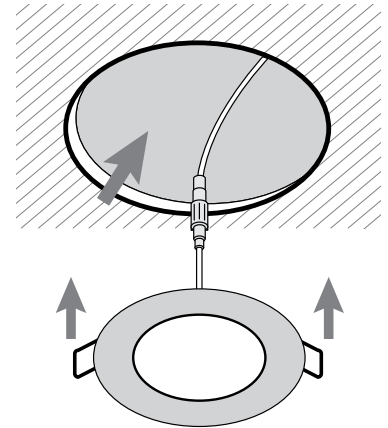

While our ultra-slim LED ceiling lights function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED units, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 8 6-inch units (120 Watts total) or 13 4-inch units (total 117 Watts).

CAUTION: ALWAYS CLOSE ELECTRICAL CURRENT BEFORE CONNECTING A LED DEVICE, otherwise the driver will be affected.