

FLP4G-10W-5CCT


TECHNICAL SPECIFICATIONS

- Sizes: 4 7/8 dia. x 2 H
- 120 VOLTS / LED 10 WATTS
- 750 LUMENS
- Degrees Kelvin: 2700K or 3000K or 3500K or 4000K ou 5000K
- Beam angle: 38° / IRC : > 80
- 4 1/4 hole to be drilled
- Approved for damp locations
- Operating temperature: from -30° to +40°
- Closed endorsement. IC for insulated ceilings
- Junction box for hardwiring and driver included



ACCESSORIES AVAILABLE

- Plaster frame PF-414 or PF-418
- 6 ft extension FLP-EX6-CCT

RECESSED LIGHTING DIMENSIONS

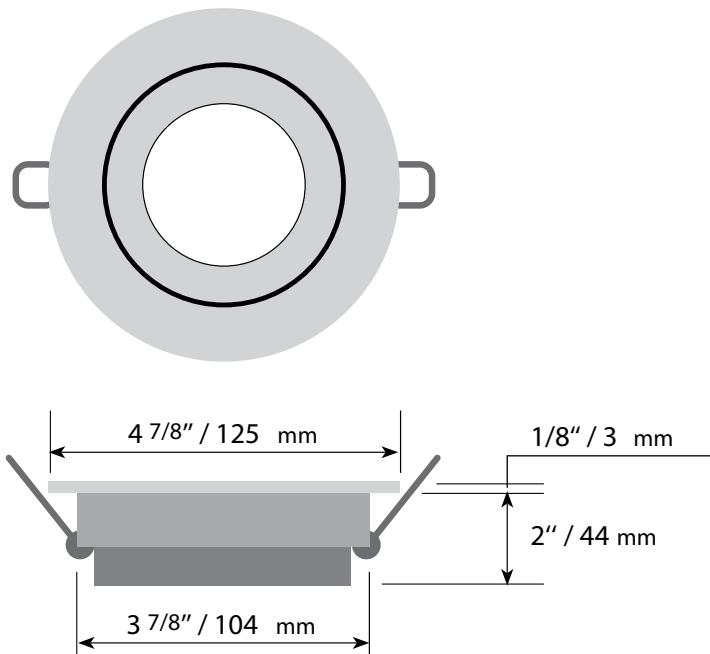

JUNCTION BOX DIMENSIONS

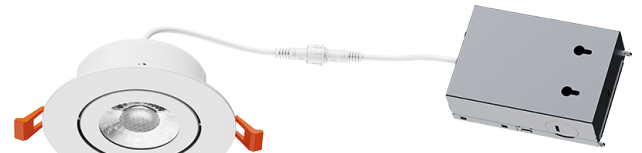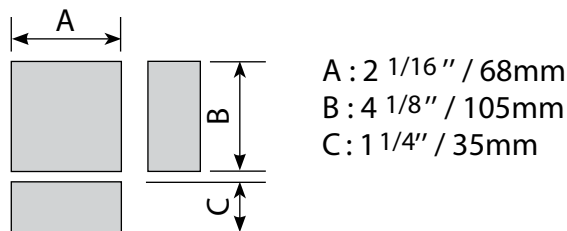

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


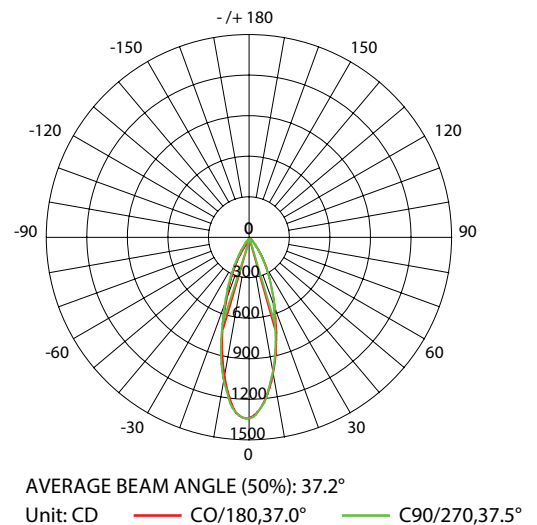


FIGURE AAI



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

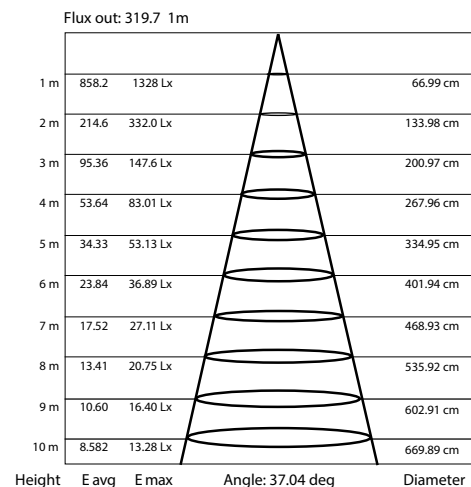


4300 Grande-Allée Blvd, Boisbriand
QC, Canada J7H 1M9

450 979-0667
info@lumifaro.com
www.lumifaro.com


CLIENT:
PROJECT:
DATE:

EASY INSTALLATION


■ 1.

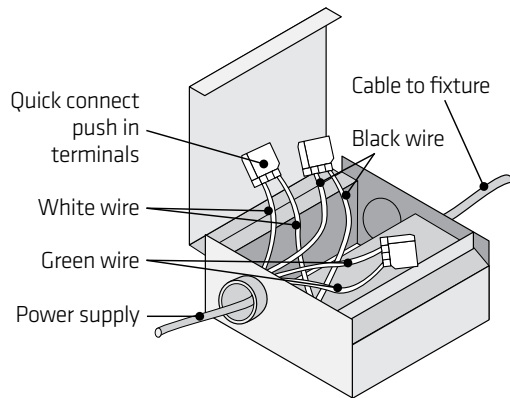

■ 2.

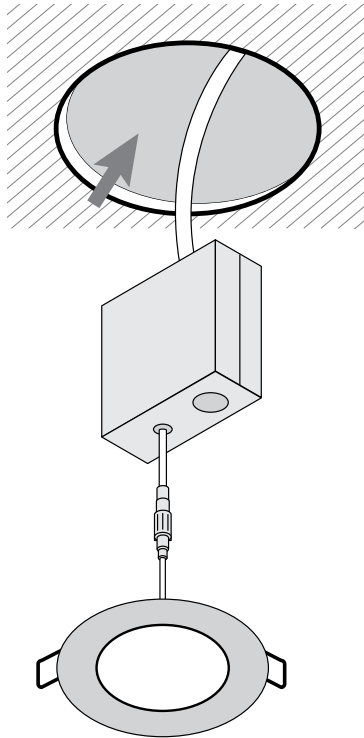

■ 3.

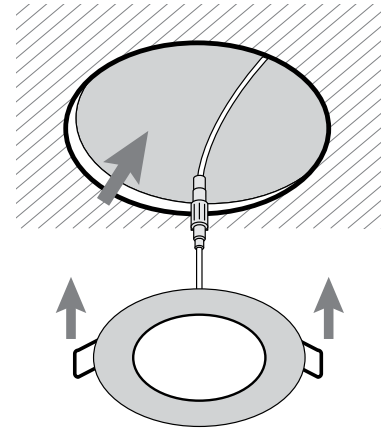

While our ultra-slim LED ceiling lights function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED units, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 8 6-inch units (120 Watts total) or 13 4-inch units (total 117 Watts).

CAUTION: ALWAYS CLOSE ELECTRICAL CURRENT BEFORE CONNECTING A LED DEVICE, otherwise the driver will be affected.