

FLP3G-8W-30K/40K


TECHNICAL SPECIFICATIONS

- Sizes : 3 1/2" dia. x 2 1/4" H
- Colours: WH-White, BK-Black
- 120 VOLTS / LED 8 WATTS
- 550 LUMENS
- Degrees Kelvin: 3000K, 4000K to choose with the selection button
- Beam angle: 38° / CRI : > 90
- 3 1/4" hole to be drilled
- Closed endorsement, IC for insulated ceilings
- Approved for damp locations
- Operating temperature: from -30° to +40°
- Junction box for hardwiring and driver included


ACCESSORIES AVAILABLE

- Plaster frame PF-314
- 6 ft extension FLP-EX6-CCT

RECESSED LIGHTING DIMENSIONS

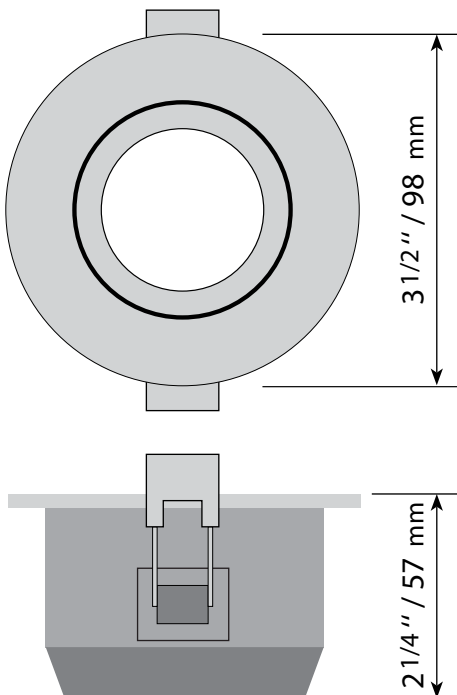

JUNCTION BOX DIMENSIONS

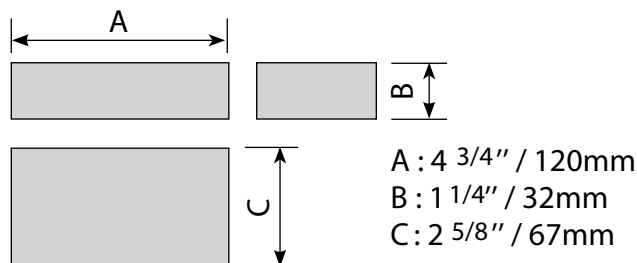

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


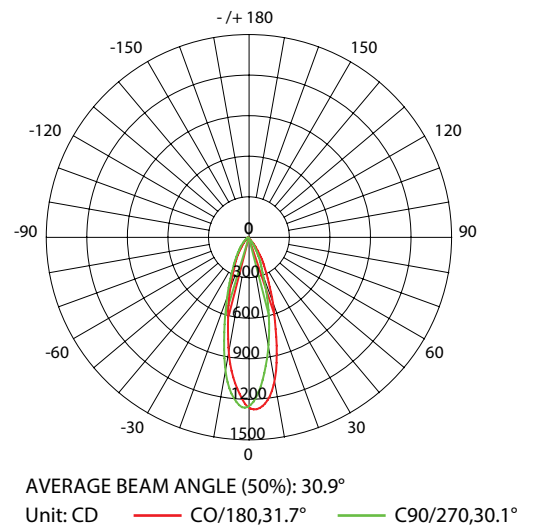


FIGURE AAI



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

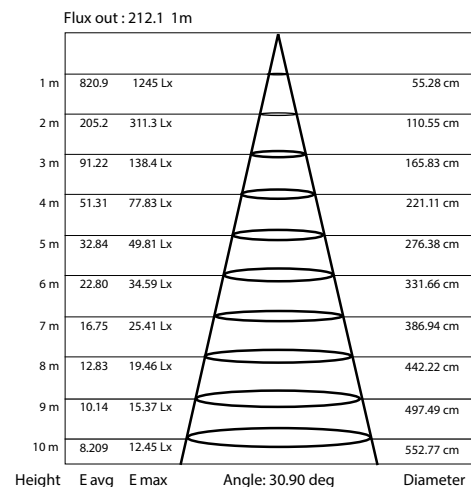

4300 Grande-Allée Blvd, Boisbriand
QC, Canada J7H 1M9

450 979-0667
info@lumifaro.com
www.lumifaro.com


CLIENT:

PROJECT:


DATE:

EASY INSTALLATION


■ 1.

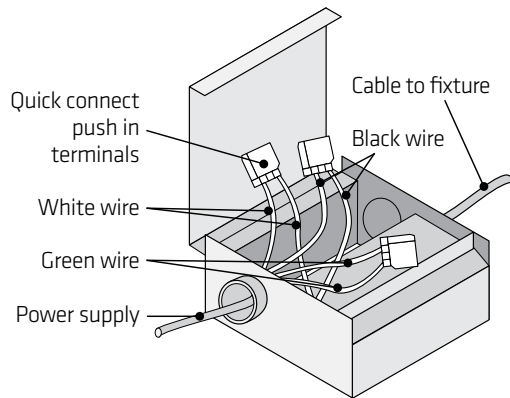

■ 2.

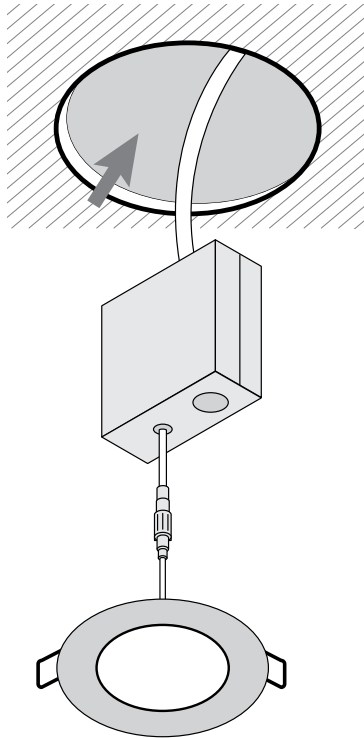

■ 3.

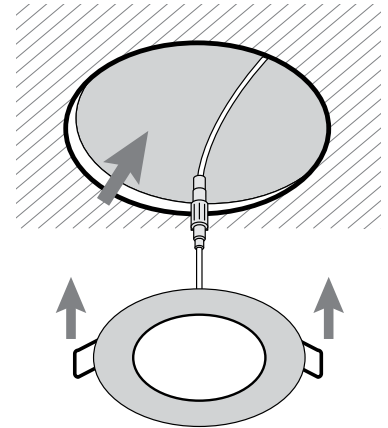

While our ultra-slim LED ceiling lights function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED units, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 8 6-inch units (120 Watts total) or 13 4-inch units (total 117 Watts).

CAUTION: ALWAYS CLOSE ELECTRICAL CURRENT BEFORE CONNECTING A LED DEVICE, otherwise the driver will be affected.