

FLP4DTW-10W-30K/22K



TECHNICAL SPECIFICATIONS

- Sizes: 4 7/8" dia. x 7/8" H
- Colours: WH-White
- 120 VOLTS / LED 10 WATTS
- 700 LUMENS
- "Dim to warm"
- Degrees Kelvin: 3000K ou 2200K
- Beam angle: 110° / IRC : > 80
- 4 1/4" hole to be drilled
- IC and Airtight
- Approved for damp locations
- Operating temperature: from -25° to +45°


ACCESSORIES AVAILABLE

- Plaster frame PF-414 or PF-418
- 6 ft extension FLP-EX6

RECESSED LIGHTING DIMENSIONS

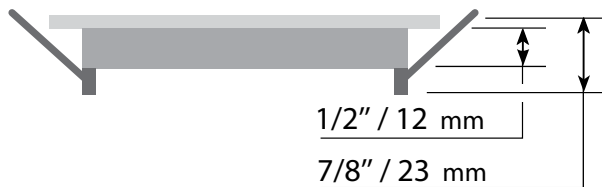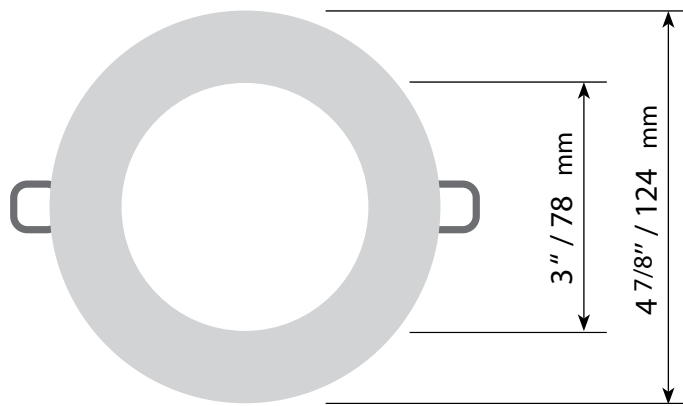

JUNCTION BOX DIMENSIONS



A : 3 3/8" / 85mm
B : 3 3/8" / 85mm
C : 1 1/4" / 32mm



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


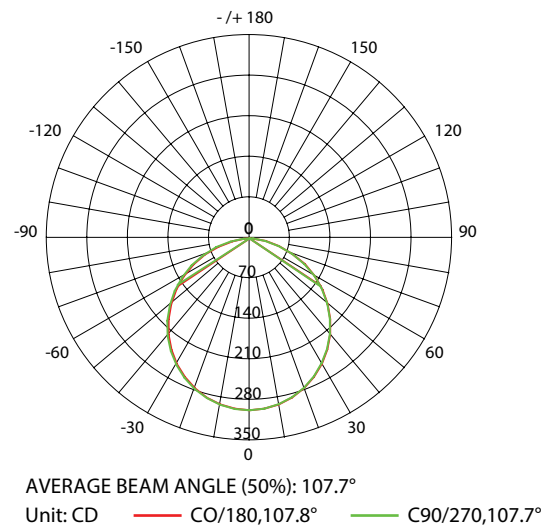


FIGURE AAI



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

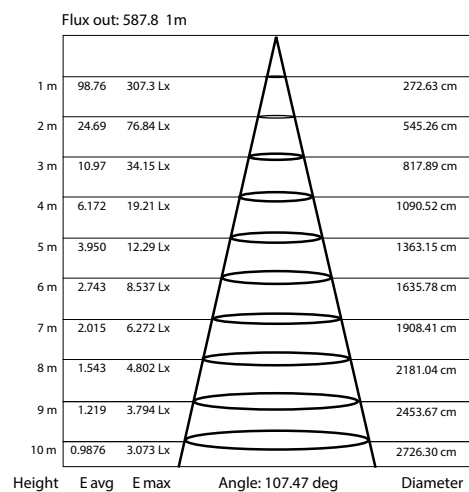


4300 Grande-Allée Blvd, Boisbriand
QC, Canada J7H 1M9

450 979-0667
info@lumifaro.com
www.lumifaro.com


CLIENT:
PROJECT:
DATE:

EASY INSTALLATION


■ 1.

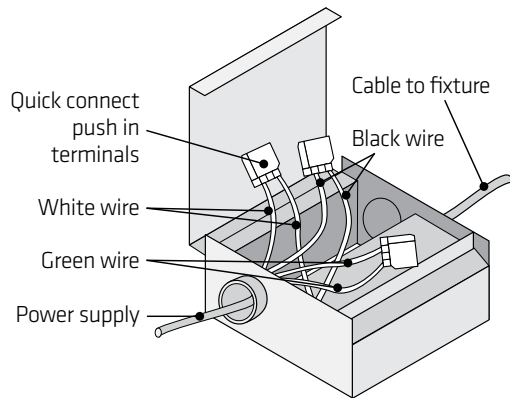

■ 2.

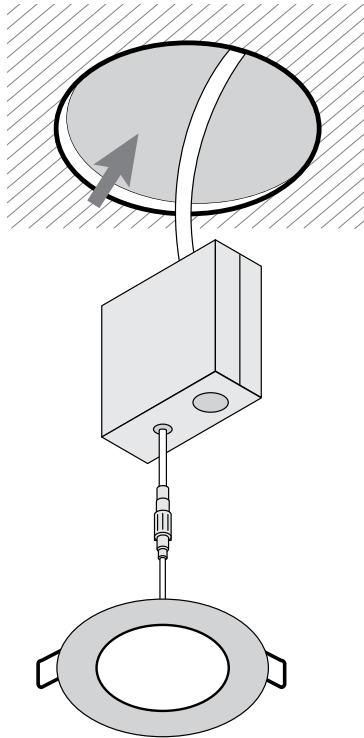

■ 3.

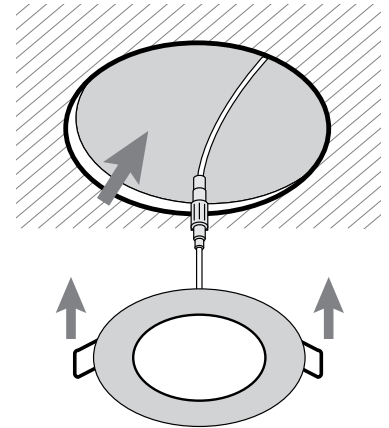

While our ultra-slim LED ceiling lights function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED units, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 8 6-inch units (120 Watts total) or 13 4-inch units (total 117 Watts).

CAUTION: ALWAYS CLOSE ELECTRICAL CURRENT BEFORE CONNECTING A LED DEVICE, otherwise the driver will be affected.