

## FLP4R-10W-30K/40K


### TECHNICAL SPECIFICATIONS

- Sizes: 4 7/8" dia. x 1 5/8" H
- Colours: WH-White, BK-Black
- 120 VOLTS / LED 10 WATTS
- 750 LUMENS
- Degrees Kelvin: 3000K, 4000K to choose with the selection button
- Beam angle: 38° / CRI : > 80
- Degree of rotation: 90°
- 4 1/8" or 4 1/4" hole to be drilled
- Closed endorsement, IC for insulated ceilings
- Approved for damp locations
- Operating temperature: from -25°C to +45°C
- Junction box for hardwiring and driver included


### ACCESSORIES AVAILABLE

- Plaster frame PF-414 or PF-418
- 6 ft extension FLP-EX6-CCT


### RECESSED LIGHTING DIMENSIONS

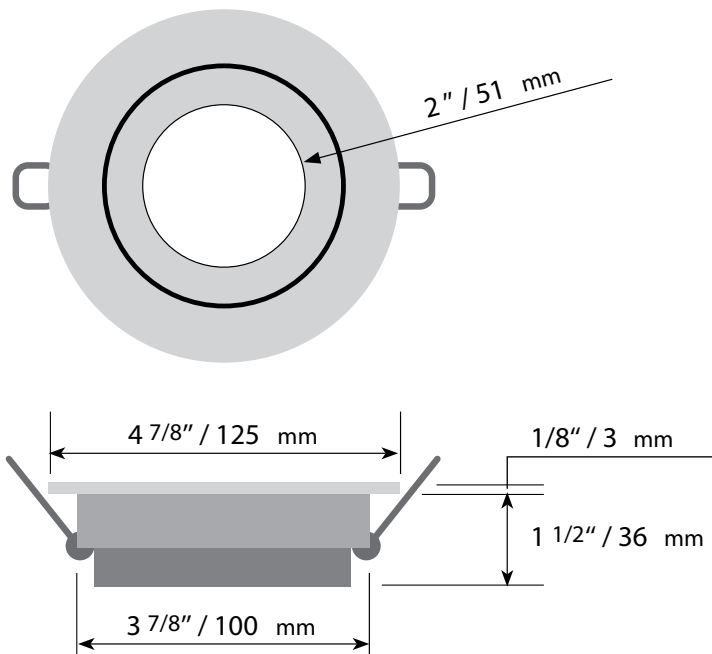


### JUNCTION BOX DIMENSIONS

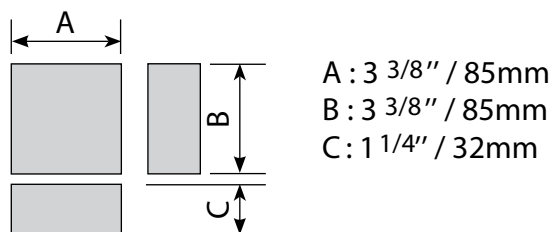

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

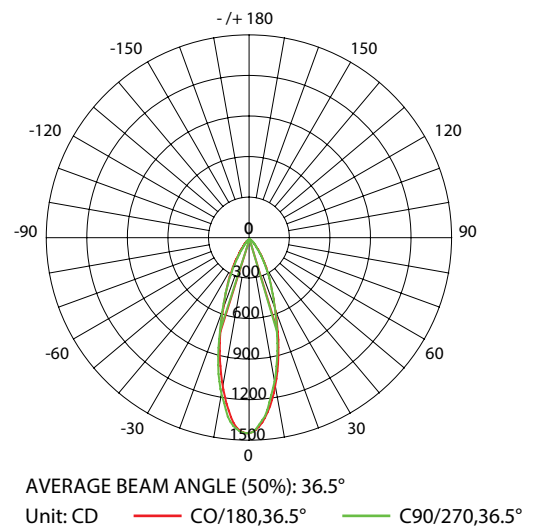

### FIGURE AAI

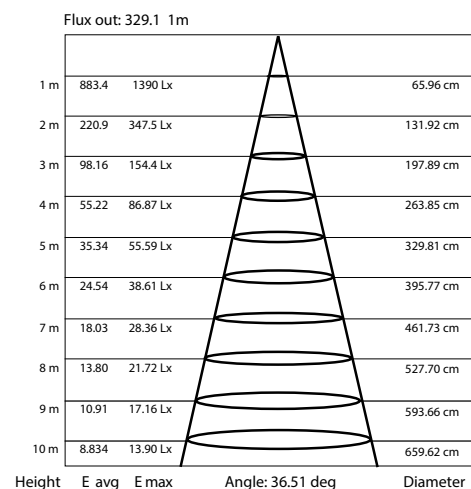

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.




4300 Grande-Allée Blvd, Boisbriand  
QC, Canada J7H 1M9

450 979-0667  
info@lumifaro.com  
www.lumifaro.com


|          |
|----------|
| CLIENT:  |
| PROJECT: |
| DATE:    |

## EASY INSTALLATION


■ 1.

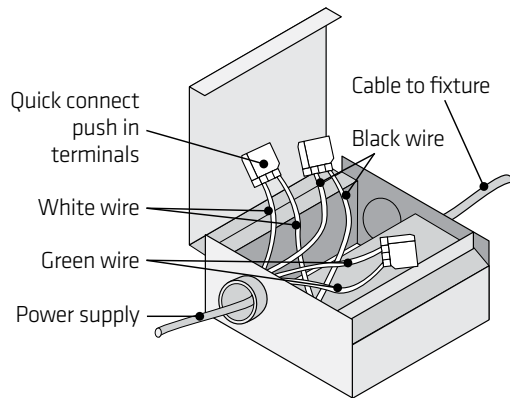

■ 2.

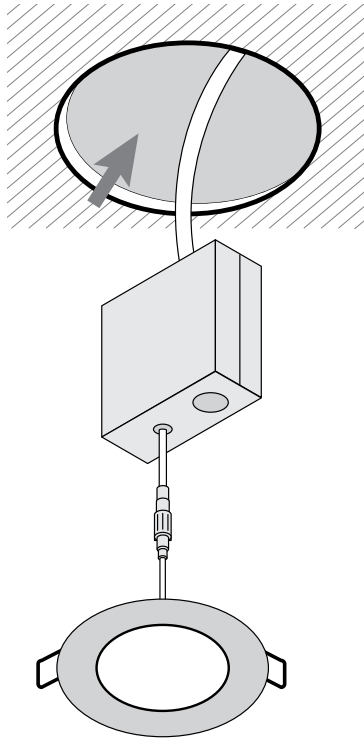

■ 3.

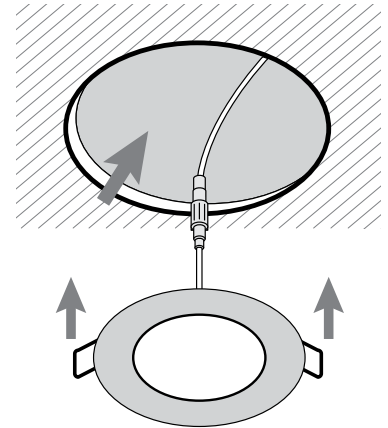

While our ultra-slim LED ceiling lights function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED units, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 8 6-inch units (120 Watts total) or 13 4-inch units (total 117 Watts).

**CAUTION:** ALWAYS CLOSE ELECTRICAL CURRENT BEFORE CONNECTING A LED DEVICE, otherwise the driver will be affected.