SUPER SLIM LED RECESSED LIGHTING

UL-263 | 3 YEARS WARRANTY | ETL Intertek | DIMMABLE

FLP4-10W-5CCT

TECHNICAL SPECIFICATIONS


- Sizes: 4 7/8'' dia. x 7/8'' H
- Colours: WH-White, BK-Black • 120 VOLTS / LED 10 WATTS
- 750 LUMENS
- Degrees Kelvin: 2700K / 3000K/ 3500k / 4000k / 5000k to choose with the selection button
- Beam angle: 110° / IRC : > 80
- 4 1/4'' hole to be drilled
- IC and Airtight
- Approved for damp locations
- Operating temperature: from -25° to + 45°




ACCESSORIES AVAILABLE


• Plaster frame **PF-414** or **PF-418** • 6 ft extension **FLP-EX6-CCT**

RECESSED LIGHTING DIMENSIONS

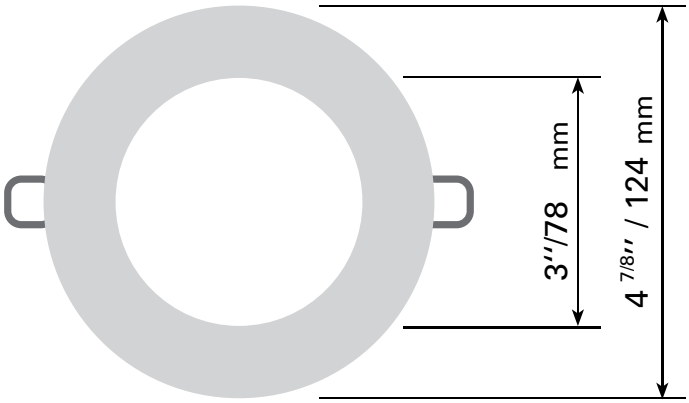

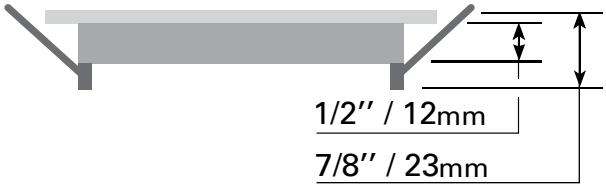


JUNCTION BOX DIMENSIONS




A : 3 3/8 '' / 85mm
B : 3 3/8 '' / 85mm
C : 1 1/4'' / 32mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

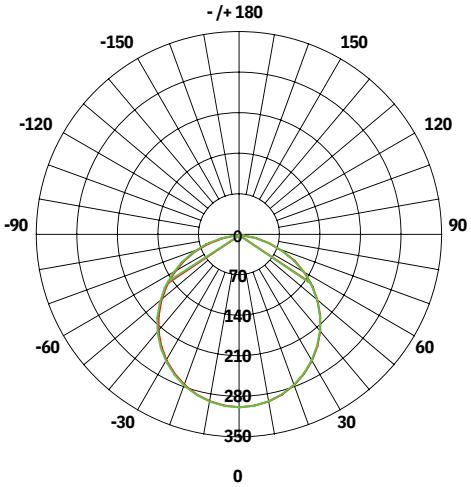

AVERAGE BEAM ANGLE (50%): 107.7°
Unit: CD CO/180,107.8° C90/270,107.7°

FIGURE AAI

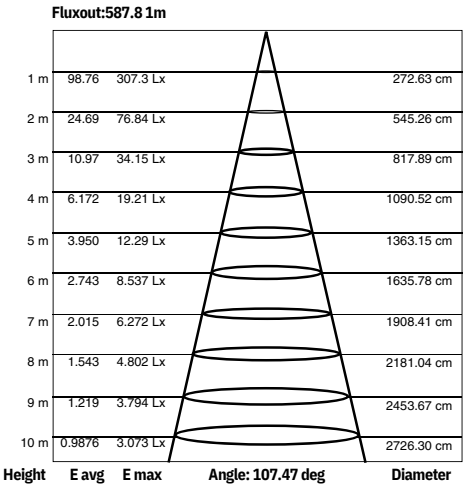

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at di erent distance.


LUMIFARO
4300 Grande-Allée Blvd, Boisbriand
QC, Canada J7H 1M9

450 979-0667
info@lumifaro.com
www.lumifaro.com


CLIENT:	
PROJECT:	
DATE:	

EASY INSTALLATION


1.

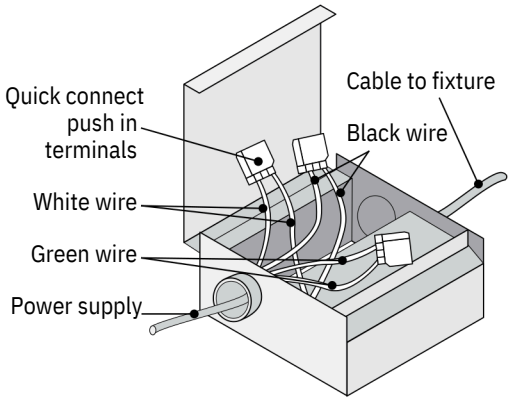

2.

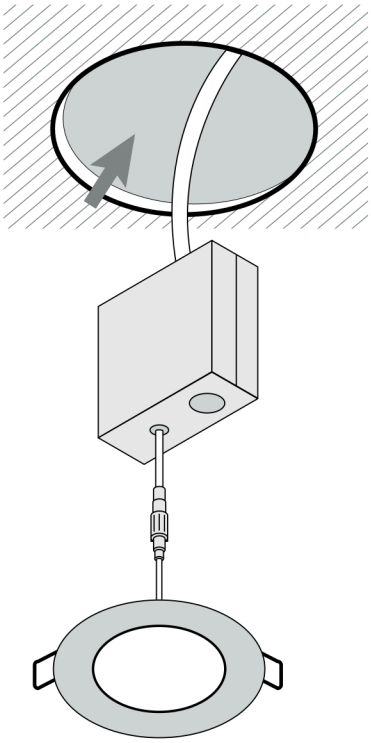

3.

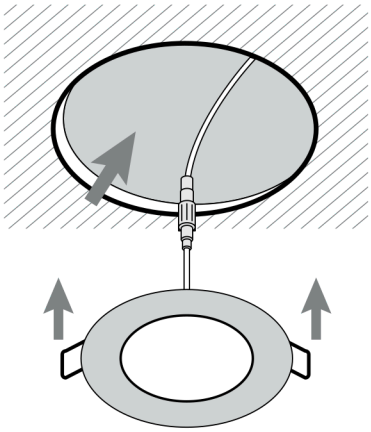

While our ultra-slim LED ceiling lights function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED units, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 8 6-inch units (120 Watts total) or 13 4-inch units (total 117 Watts).

CAUTION: ALWAYS CLOSE ELECTRICAL CURRENT BEFORE CONNECTING A LED DEVICE, otherwise the driver will be affected.